


The KSG®-25 shares the same platform and features as the KSG® but with an increased barrel length, increased magazine tube capacity and upgraded features like the MAGPUL® MBUS® sights (front and rear), MAGPUL® RVG® Rail Vertical Grip, and Kel-Tec's® aluminum followers. It is our longest barrel and receiver yet for increased accuracy, and still a shorter overall length than traditional 18.5" barreled pump shotguns. The front heat shield of the weapon also includes the M-LOK® Slot System for mounting various light weight accessories.

For full weapon safety, instruction and parts, please refer to the manual included with this insert.

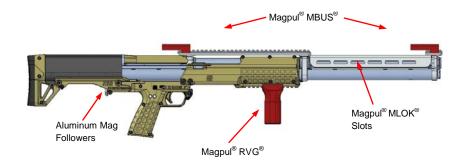

KSG®-25 Specifications				
Operating System	Pump-Action			
Capacity (Dual Magazines)	10+10+1: 3" shells 12+12+1: 2.75" shells 20+20+1: 1.5" shells 12-gauge 3.00" (76 mm) 30.5" (775 mm)			
Chamber				
Barrel Length				
Length of Pull	13.0" (330 mm)			
Total Length	38.25" (971 mm)			
Accessory Mount(s)	Picatinny Rails and M-LOK®  9.25 lbs (4.25 kg)			
Weight (unloaded)				

## **KSG-25 EXCLUSIVE PARTS**

FOR ALL OTHER PARTS, SEE KSG MANUAL

1140 1219 130 133 135 136 137 138 139 141 142 143 145 173 230 232 MAG247 MAG248 MAG412	MUZZLE PLATE ASSEMBLY FOREND ASSEMBLY WITH CARRIER BARREL LONG FRONT HEAT SHIELD BARREL EXTENSION BARREL RING SIGHT BASE PUMP BUFFER M3-20 SOCKET HEAD PICATINNY SLEEVE PLATE PIC RAIL SHORT HEAT SHIELD M4-6 BUTTON HEAD M4-12 BUTTON HEAD MAGPUL® MBUS® FRONT SIGHT MAGPUL® MBUS® REAR SIGHT MAGPUL® RVG® RAIL VERTICAL GRIP	137 139	135 136 138 138 139 1310 310
210 310 320 322 323 328 330 331 333 334 336 338 500 511	M3-10 SOCKET HEAD MAG PLUG SELECTOR WASHER SELECTOR SNAP CTG STOP PIN SELECTOR SNAP SPRING CTG CATCH INNER CTG CATCH OUTER SELECTOR CTG STOP ACTUATOR ACTUATOR SPRING CTG STOP SPRING RECEIVER LONG ALUMINUM FOLLOWER	336 336 330 331 323 334 334 323 330 330 330 330 330 330 330	500  338  525  525  525  525  525  525  Exploded view of weapon is for reference only.
525	MAG SPRING LONG		Design is subject to change without notice