Exterior Perimeter Base Flashing Detail

Side View

FSI-96 Non Skinning
Butyl Caulk

1/4" - 14 x 7/8" Tek 1
12" on center

1/4" - 14 x 7/8" Tek 1
12" on center

FSI-96 Non Skinning
Butyl Caulk

26 Gauge Exterior perimeter
base flashing

Permatherm Insulated
Wall panel

18 ga or 16 ga Base channel

1/4" - 14 x 7/8" Tek 1
12" on center

Anchor Bolt

FSI-96 Non Skinning Butyl Caulk
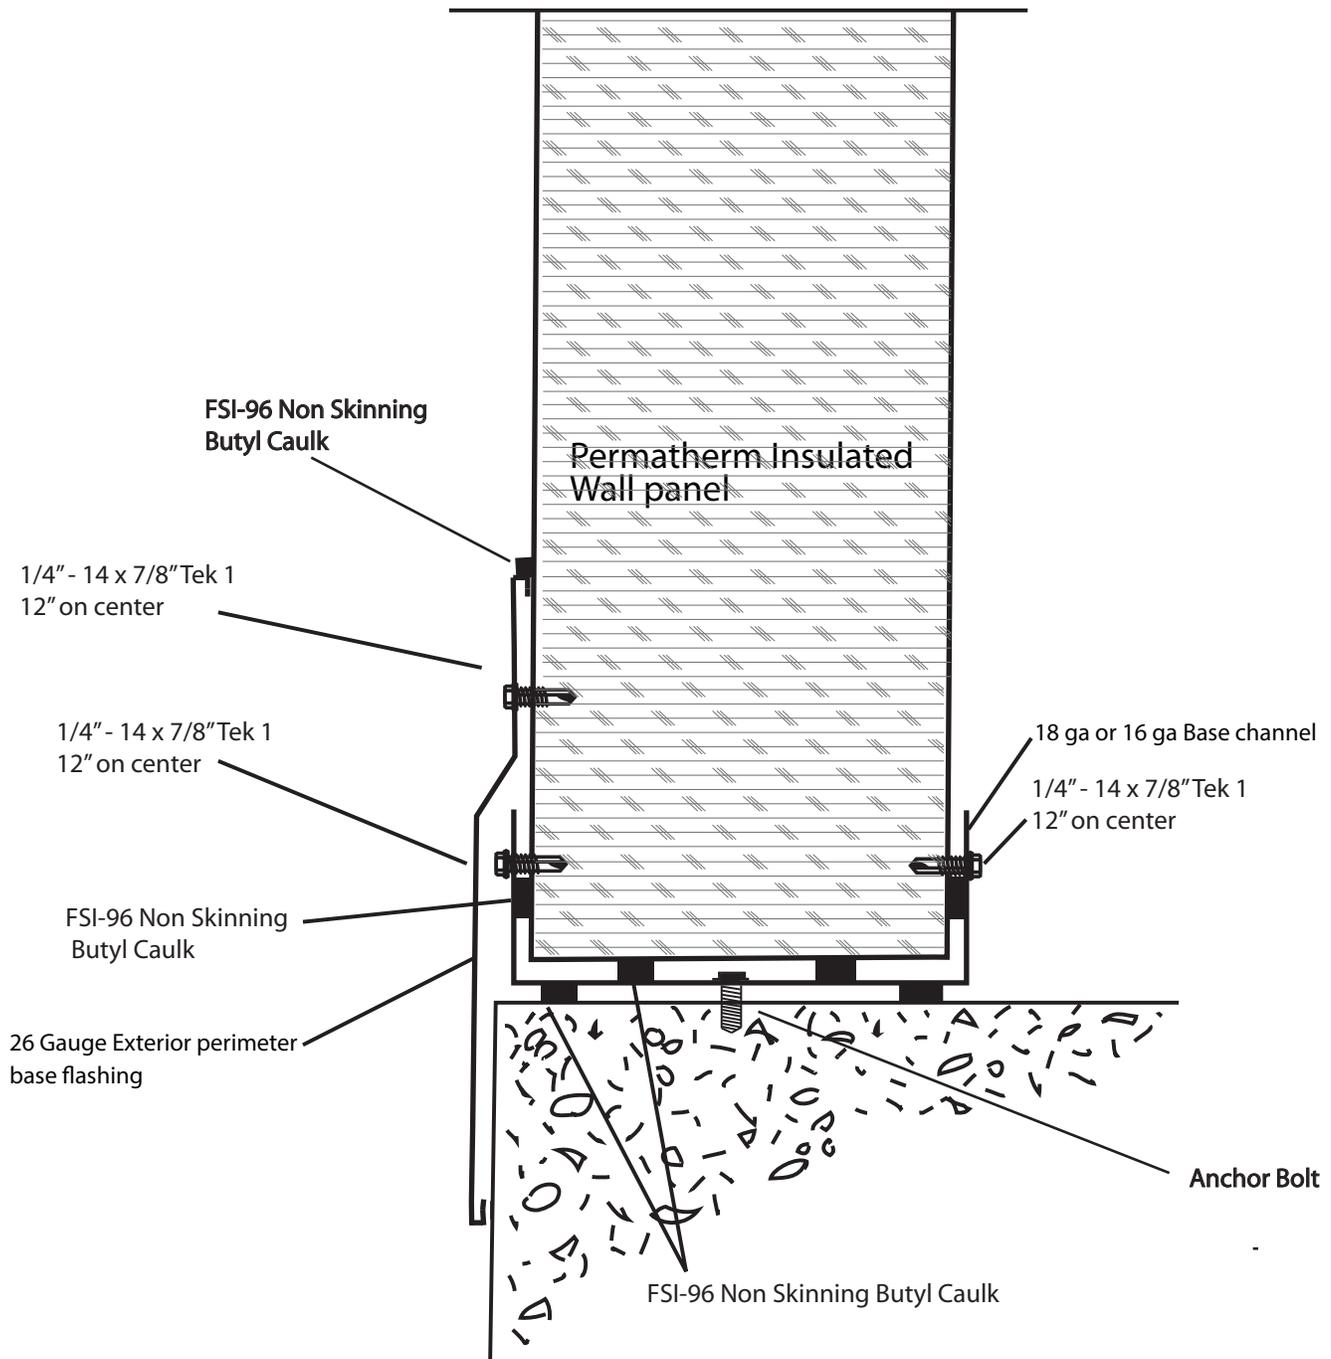
This detail is commonly used for this application; however, every building project is different. You should consult your building engineer to make sure this detail will work for your particular application.

PermaTherm