EK SERIES: PROFESSIONAL ELECTRICAL SPACE HEATERS

CLEAN HEAT FOR EVERY NEED

EK-C



www.biemmedue.com





COMPANY WITH QUALITY MANAGEMENT
SYSTEM CERTIFIED BY DNV
= ISO 9001:2008 =


ARCOTHERM SPACE HEATERS OF THE EK-C RANGE PROVIDE **IMMEDIATE AND CLEAN HEAT**

The ideal heating solution for all environments where diesel, methane and LPG cannot be used. Safe and low-noise, the electric heaters are practical and efficient, providing instant heat in small and medium-sized industrial and private buildings, warehouses and public areas. The heaters are a simple but highly effective solution for the commercial and construction sectors as they reduce drying and moisture removal times.


Technical features



- a) Stainless steel grid b) Very strong steel plastic feet c) Power cord 1,5 m with plug
- d) Handle

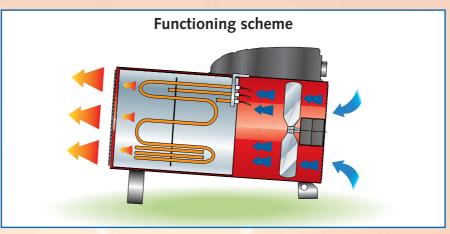

Control panel



- 1) Power switch
- 2) Safety thermostat with manual reset 3) Selector switch 1,5 3,0 kW
- 4) Room thermostat

Ductability EK 10 C - EK 15 C



Optional

Trolley kit



- a) Stainless steel grid b) Very strong steel painted feet c) Power cord 1,5 m with plug

thermal power capacity (kW)

power requirement (V-Hz)

shipping dimensions (mm)

d) Handle and power cord support



- 1) Selector switch (EK 10: 0-fan-5 kW-10 kW) (EK 15: 0-fan-10 kW-15 kW)
- 2) Room thermostat
- 3) Safety thermostat with manual reset

EK 3 C	EK 10 C	EK 15 C	
1,5÷3	5÷10	10÷15	
500	1500	2000	
36-52	30-65	45-70	
50-0,40	112-0,70	240-1,15	
230-50	230-50	230-50	
7	12	15	
367x180x280	505x277x511	575x277x511	
392x277x217	542x387x315	610x387x315	
8	13	16	

The specifications are not binding and may be modified without notice.





Trolley kit allows the machines stackability up to four units



model

airflow (m3/h) temperature rise (°C) power (W-A)

net weight (kg) dimensions (mm)

gross weight (kg)