




EK





GENERATORI MOBILI D'ARIA CALDA A CORRENTE ELETTRICA
ELECTRICAL SPACE HEATERS

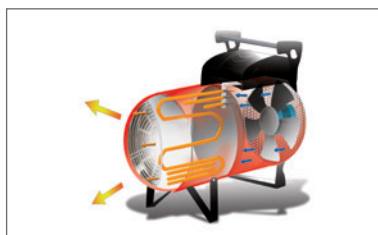
EK - GENERATORI MOBILI D'ARIA CALDA A CORRENTE ELETTRICA ELECTRICAL SPACE HEATERS

- Resistenze elettriche corazzate AISI 321 avvolte a profilo ad alto scambio termico
 - Termostato ambiente incorporato
 - Selettore di potenza
 - Cavo alimentazione elettrica (1,5 m) con spina (EK 3)
 - Termostato di sicurezza a riarmo manuale
 - Griglia anteriore in acciaio inox
 - Canalizzabile fino a 6 m (EK 10, EK 15)
 - Possibilità di impilamento
- Extra strength elements AISI 321 for high performance
 - Built-in room thermostat
 - Selector switch
 - Power cord (1,5 m) with plug (EK 3)
 - Safety thermostat with manual reset
 - Stainless steel front grid
 - Ductable up to 6 m long (EK 10, EK 15)
 - Possibility to stackability



ACCESSORI A RICHIESTA / ACCESSORIES ON DEMAND

SPINA 4-5 POLI 4-5 PIN PLUG	ADATTATORE GUAINA DUCT ADAPTER	GUAINA FLESSIBILE IN PVC L= 6 m CON CINGHIA DI FISSAGGIO Ø 300 mm FLEXIBLE AIR DUCT 6 m LONG WITH CLIP Ø 300 mm	KIT CARRELLO TROLLEY KIT
			
Mod. 3P+⊥ EK 10 Cod. 06AC102 16A Mod. 3P+⊥ EK 15 Cod. 06AC103 32A Mod. 3P+⊥+N EK 10 Cod. 06AC104 16A Mod. 3P+⊥+N EK 15 Cod. 06AC105 32A	Mod. EK 10 - EK 15 Cod. 06AC101	Mod. EK 10 - EK 15 Cod. 02AC562	Mod. EK 10 - EK 15 Cod. 03AC501

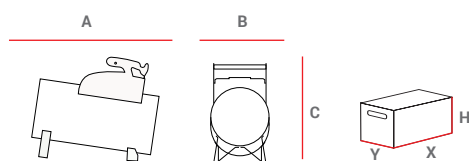

MOD	PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE				IMBALLO PACKAGING			
	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
EK 3 C	367	180	280	5	392	277	217	6
EK 10 C	505	277	511	13	542	387	315	14
EK 15 C	575	277	511	15	610	387	315	16

		EK 3 C	EK 10 C	EK 15 C
codice - code		06EK101	06EK102	06EK103
potenza term. nominale max max rated heat power	Hs [kW] Hs [kcal/h - BTU/h]	3 2.580 - 10.235	10 8.600 - 34.120	15 12.900 - 51.185
potenza term. nominale min. min rated heat power	Hs [kW] Hs [kcal/h - BTU/h]	1,5 1.290 - 5.185	6,6 5.675 - 22.520	10 8.600 - 34.120
rendimento - heat efficiency	[%]	100	100	100
portata d'aria - air flow	[m3/h]	450	1.500	2.000
salto termico - temperature rise	a 20°C [°C]	44,5 - 32	48,3 - 30,5	54,3 - 35
corrente massima - current max	[A]	12 - 6,2	13,6 - 7,1	21 - 13,8
alimentazione elettrica - electrical power	[V - ph - Hz]	230 - 1 - 50	400 - 3 - 50	400 - 3 - 50
quantità per pallet - pallet quantities	[pz - pcs]	72	36	24