




Main Features:

- 4U Rackmount Hotswap Server Chassis
- Dimension: L650 /L560 *W437.5*H176.50 mm
- 36*3.5"/2.5" Tooless Hard-disk Drive Bays
- 2*2.5" SSD bays (Rear/Hotswap function Option)
- Various Kinds Backplane—6Gb/s Expander(E06), 12Gb/s Expander(E12)+12Gb/s HD SGPIO(G12)
- SAS Controller BP with PWM & SGPIO etc Function
- Excellent 3*12038mm PWM Dual-Balling Tooless fans (Middle)
- Support 2U Redundant 1+1 / 2U Single / ATX Powersupply
- Support MAX 12"*13" Board
- Support 7*half Height Function Expansion Card Slots

Specification

Model		S46536-E06	S46536-E12M12	OEM
Chassis	Form Factor	4U Standard 19"Rack-mount		
	Size (L*W*H)	L650*W437.5*H176.50 mm		
	Cooling Fans	3*12038mm +4*8038mm PWM Dual Balling Fans (Tooless Design)		
	Material	1.0mm Superior SGCC , Front-Coated in Black		
	Backplane	6Gbps Expander Backplane	12Gbp SGPIO BP+Expander BP	Other simple 6Gb SGPIO BP etc.
	BP Function	Hotswap / FAN PWM / SGPIO	Hotswap / FAN PWM / SGPIO	Option
Storage Bays	SATA/SAS /SSD	36*2.5"/3.5" Harddisk Driver Bays (Hotswap)		
	Other Disks	2*2.5" Harddisk Driver Bays (Rear/Option Hotswap BP Mould)		
	Raid Function	N/A (Depends on the client motherboard & Raid card)		
FP Controller	LED	Power LED, HDD LED, 2xNIC LED, UID LED, Fan Fail LED, PWR Fail LED		
	Switch	Power SW, Reset, UID SW, 2xUSB2.0		
Motherboard	Processor Type	Support Single/Dual Processors		
	Size	Upto 12*13 inch Board		
Expansion	Chassis Slots	7*half height function Card Slots		
Power Supply	Form Factor	Support 2U Redundant 1+1 /2U Single Power Supply		
	Recommend	Greatwall/Delta 1+1 800W/1200W/1600W 80 Platinum RPSU		
Environment	Operating Temp.	-10°C ~ 60°C		
	Storage Temp.	-20°C ~ 70°C		
	Relative humidity	5%-95% Relative humidity, no condensation		
	Work vibrates	0.5g rms/5-500HZ/random/operating		

Physical Drawing

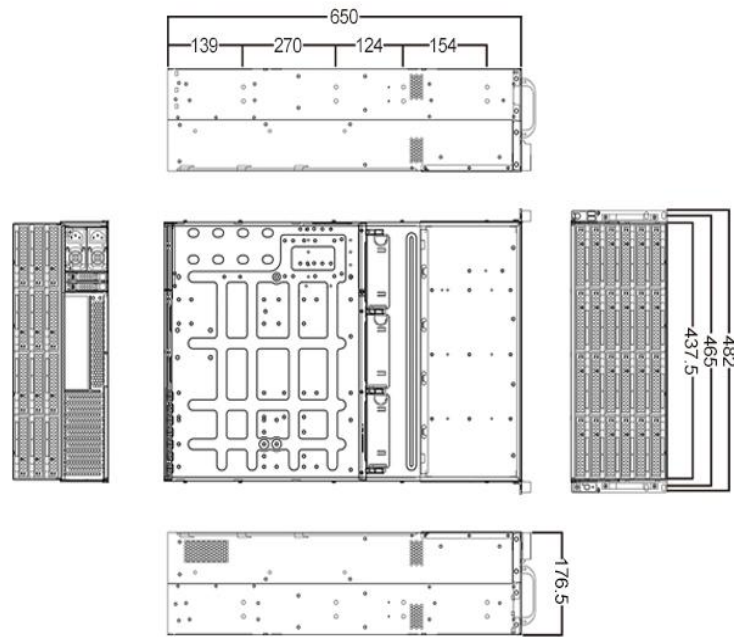

Unit:mm

Detail Views

Front-View 1



Front-View 2



Front-View 1



Top-View



Rear-View



Barebone-Rear View 2



Order Information

No.	Model	Type	Backplane Option	Fans	Powersupply Option	Hotswap HDD Tray Option
1	S46536-E06	4U Rack	E06	3*12038mm PWM,4*8038mm PWM Dual-Balling Fans	2U 800W/1200W/1300W CRPS	Style A/C/S Toolless F/J
2	S46536-E12M12	4U Rack	E12M12	3*12038mm PWM,4*8038mm PWM Dual-Balling Fans	2U 800W/1200W/1300W CRPS	Style A/C/S Toolless F/J