



Scientech 2473 Level Measuring WorkStation consists of an instrument panel and transparent tank with different type of level sensor that is useful for the study of principal and working of level measuring setup. This system comprises of the latest components, which reflect the latest technological innovations in this field. level Measuring WorkStation endows students and industry professionals to understand the concepts and working of level Measuring instruments and control, and enables them to learn advance and more complex level process systems.

Scientech 2473 consists of different types of level Sensors such as Ultrasonic, Capacitance type, Point to Point, Pressure type, Magnetic Float type and DAQ, Solenoid Valve, Sump tank and Acrylic Measuring tank. The set-up has safety measures such as emergency shutdown and overheating protection. A wide range of experiments can be performed on the platform.

Features


- Included of Different type of Level Sensors like: Ultrasonic, Capacitive type, Point to Point, Pressure type, Magnetic Float type
- 7" Human Machine Interface (HMI)
- Types of Controller : DAQ ,HMI, and PC
- Start, Stop, Pump, Solenoid Valve buttons and Indicator for Visual Indicator, Audio Indicator, Pump & Solenoid Valve
- Industry-standard instruments and controls
- Interface with Ethernet based DAQ
- Sump Tank & Acrylic Measuring Tank
- 8 Channel 24 bit ADC
- Real time DAQ Interface with ADC and Digital input/output
- Academic and vocational study for process control engineers and plant technicians
- Experiments configurable through Patch board
- Self-contained, bench-mounting arrangement
- Supplied with Dashboard Software for supervisory control of the process with data acquisition
- Castor Wheel (with locking mechanism) is provided at legs of workstation so that it can be easily moved
- MCB is provided with AC supply for safety purpose
- Enhanced electrical safety consideration
- Online product tutorial

Scope of Learning

Study and use of:

- Characteristics of Capacitance Type Level Sensor .
- Characteristics of Pressure Type Level Sensor
- Characteristics of Ultrasonic Type Level Sensor
- Characteristics of Magnetic Float Type Level Sensor
- Characteristics of Point to Point Type Level Sensor
- Open & close loop function
- ON/OFF controller using software
- Proportional controller using software
- Proportional-Integral controller using software
- Proportional-Integral-Derivative controller using software
- Human Machine Interface (HMI)
- Process Control & Monitor by HMI
- Creating Application/Screen in HMI
- Downloading and Uploading programs
- HMI Communication with PLC
- Creating Alarm Message in HMI
- Creating Trend in HMI

Software window

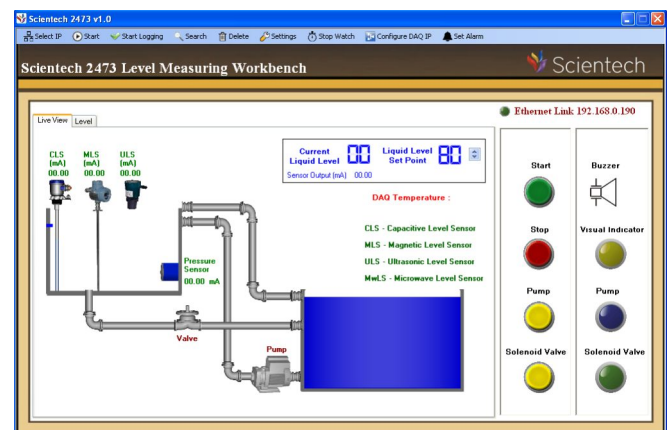

Technical Specifications

DAQ	: 1 no. (Data Acquisition System)
Analog Input	: 4 nos.
Analog Output	: 2 nos.
Digital Input	: 6 nos.
Digital Output	: 4 nos.
ADC Resolution	: 24 bit
Two Unity Gain Amplifier	: 0 to 5V
Ethernet Interface	: Yes
RS485 Interface	: Yes
Data Logging	: Yes
HMI	: 1 no. (Human Machine Interface)
Supply	: +24V DC
CPU	: 32-bits 400MHz RISC
Storage	: 128M FLASH + 64M DDRAM
Display size	: 7 inch
Resolution	: 800x480 TFT LCD 65,536 colors
Interface	: RS485
Touch Screen	: High precision four-wire resistive

Type of Level Sensors

Volumetric Pressure Sensor	: 1 no.
Supply	: 90 to 260V AC, 50 Hz
Accuracy	: ± 0.5 % of full scale
Output	: 4 to 20mA, 2 Wire System
Probe Body	: SS-304
Rating	: Rated at 6A, 230VAC for non inductive loads
Housing	: Single Channel wall mounting

Ultrasonic Sensor	: 1 no.
Supply	: 5VDC
Output	: 0 to 5VDC
Range	: Upto 5.00M
Magnetic Float Sensor	: 1 no.
Supply	: +24VDC
Output	: 4 to 20mA
Sensing	: Rod SS304
Housing	: Cast Aluminum weather proof
Range	: 0.5 Meter
Capacitances Sensor	: 1 no.
Housing Enclosure	: Cast Aluminum weather proof
Supply	: +24VDC
Measurement Span	: 15 to 50000 pf above zero
Response Time	: 0.5s to 5 sec
Accuracy	: +/-1% FSL
Output	: 4 to 20mA
Range	: 0.5 Meter
User Interface	: 4 Digit display with 4 keys and LED
Point to Point Sensor	: 1 no.
Supply	: 5VDC
Output	: 0 or 5VDC
Sensing	: Rod SS304
Digital Panel Meter	: 2 nos.
Display	: 4 Digit, 7 segment digital display
Keys	: 3 for Digital Setting
Input Type	: Current
Resolution	: 1 or 0.1 degree
Supply Voltage	: 230V AC

Panel Component Description

- Push to On Switch : 4nos.
- Indicators : 4nos.
- Toggle Switch : 4nos.
- Contactor : 1no.
- Solenoid Valve : 1no.
- Pump : 1no.
- Sump Tank : 1 no.
- Capacity : 100Litters
- Acrylic Measuring Tank : 1no.
- Capacity : 65Litters
- Manual Valve : 3nos.
- Castor Wheel : 4nos (2 with lock & 2 without lock)
- Size : 75mm
- Dimension in mm : H1735 x W1500 x D 740
- Included Accessories
- 4mm Patch Cord 18" : 8 nos. (Yellow)
- 4mm Patch Cord 18" : 8 nos. (Blue)
- 4mm Patch Cord 25" : 8 nos. (Red)
- 4mm Patch Cord 25" : 8 nos. (Black)
- Ethernet Cable : 1 no.
- Windows OS Based PC (optional)

Note: Windows OS Based Computer is required to explore DAQ experiments

HMI window

