

hose reels - metal


# twin pedestal metal hose reels

Provided with twin pedestal supports for added strength and stability, these heavy duty reels are ideal for truck mount applications. All spring rewind models have an external spring cartridge which allows cartridge replacement without removing the reel from its mounted position.


### Features

- 4 bolt heavy duty steel mounting plate
- locking mechanism allows for precise hose length adjustment
- adjustable guide arm - can be wall, floor, ceiling, pit or vehicle mounted
- multi directional nylon roller guides reduce hosedrag and wear
- external spring cartridge (except powered rewind diesel reel) for easy maintenance & safety
- full flow heavy duty swivel for maximum product delivery
- powder coated finish for corrosion resistance
- 5 year warranty
- 10 year parts guarantee

\*Macnaught can produce metal reels to suit your specific requirements. Minimum order quantities apply.

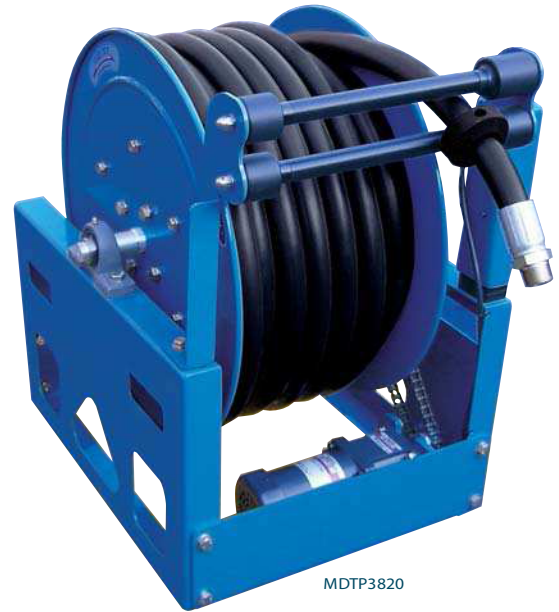

MDTP3820

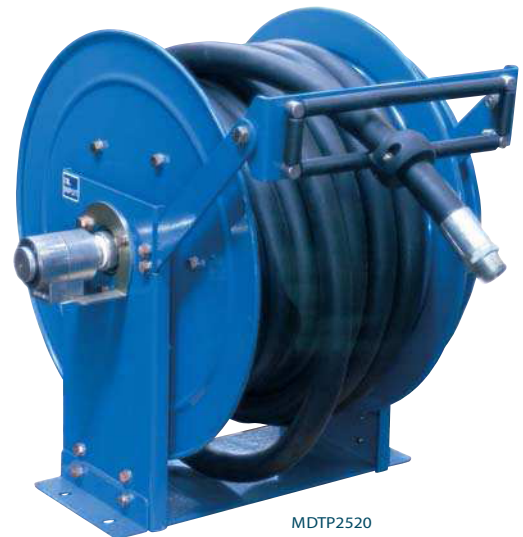

MDTP2520

| Model    | Description                        | Hose ID           | Hose Length | Working Pressure       | Hose Rewind | Max Op Temp | Reel Inlet | Hose Outlet |
|----------|------------------------------------|-------------------|-------------|------------------------|-------------|-------------|------------|-------------|
| MATP1220 | Air/Water                          | 12 mm (1/2")      | 20 m        | 2100 kPa (300 psi)     | Spring      | 80°C        | 1/2" BSP   | 1/2" BSP    |
| MATP1920 | Air/Water                          | 19 mm (3/4")      | 20 m        | 2100 kPa (300 psi)     | Spring      | 80°C        | 3/4" BSP   | 3/4" BSP    |
| MDTP2520 | Diesel                             | 25 mm (1")        | 20 m        | 3500 kPa (500 psi)     | Spring      | 80°C        | 1" BSP     | 1" BSP      |
| MDTP3820 | Diesel (electric 24V)              | 38 mm (1 1/2")    | 20 m        | 3500 kPa (500 psi)     | 24 V DC     | 80°C        | 1 1/2" BSP | 1 1/2" BSP  |
| MGTP0615 | Grease                             | 6 mm (1/4")       | 15 m        | 34 500 kPa (5,000 psi) | Spring      | 100°C       | 1/4" BSP   | 1/4" BSP    |
| MGTP0915 | Grease                             | 9 mm (3/8")       | 15 m        | 34 500 kPa (5,000 psi) | Spring      | 100°C       | 3/8" BSP   | 3/8" BSP    |
| MOTP1220 | Oil                                | 12 mm (1/2")      | 20 m        | 6900 kPa (1,000 psi)   | Spring      | 100°C       | 1/2" BSP   | 1/2" BSP    |
| MOTP1920 | Oil                                | 19 mm (3/4")      | 20 m        | 6900 kPa (1,000 psi)   | Spring      | 100°C       | 3/4" BSP   | 3/4" BSP    |
| WPTP1050 | Weedicide/pesticide (electric 24V) | 10 mm (3/8")      | 50 m        | 3500 kPa (500 psi)     | 24 V DC     | 80°C        | 3/8" BSP   | 3/8" BSP    |
| SSR1320N | Stainless steel                    | 13 mm (1/2")      | Bare reel   | 20 700 kPa (3,000 psi) | Spring      | N/A         | 1/2" BSP   | N/A         |
| SSR2520N | Stainless steel                    | 25 mm (1") Swivel | Bare reel   | 13 800 kPa (2,000 psi) | Spring      | N/A         | 1" BSP     | N/A         |

Head Office - Sydney  
Macnaught Pty Ltd  
41-49 Henderson St, Turrella  
Sydney NSW 2205 Australia  
P: +61-2-9567 0401  
F: +61-2-9597 7773  
E: info@macnaught.com.au  
W: www.macnaught.com.au



Macnaught USA  
Macnaught USA, Inc.  
614 South Ware Boulevard  
Dock 14A (for deliveries)  
Tampa, FL 33619  
P: 813-628-5506  
F: 509-694-8495  
E: info@macnaughtusa.com  
W: www.macnaughtusa.com



**LUBE  
Control**

**Lube Control Pty Ltd**  
Providing lubrication solutions!

Unit 5/53 Norfolk Rd,  
Marion, SA 5043  
t: (08) 8298 5563  
f: (08) 8298 6253  
e: info@lubecontrol.com.au

[www.lubecontrol.com.au](http://www.lubecontrol.com.au)

