ONYX FirstVision™

Interactive Firefighters' Display



Network Systems

General

ONYX FirstVision™ is a revolutionary wayfinding navigational tool for firefighters and other emergency responders. ONYX FirstVision™, a touch screen, graphically displays critical information on the origin and spread of a fire; allowing firefighters to quickly locate and extinguish the fire.

With ONYX FirstVision™, emergency responders can immediately gather the information needed to accurately pinpoint the source of the fire and the rate at which it's spreading. Crucial information is easy to access with a spatial, graphical depiction of the location of activated detectors and detector sequence of activation for one or multiple buildings. In addition, ONYX First-Vision™ is an interactive interface. It displays CCTV video and a summary of building floor plans with detailed information about the building. Details can include locations for all fire alarm devices; water supplies; evacuation routes; access routes; chemical and structural hazards in the building; and shutoffs for gas, power, and HVAC.

Features

GENERAL

- 19" LCD touch-screen.
- Interfaces to the ONYX® Series panels or NOTI•FIRE•NET (version 5.0 or higher) through the NFN Gateway over Ethernet.
- Compatible with standard and High Speed NOTI•FIRE•NET™
- Supports the following additional languages: Arabic, French (Canadian), Hebrew, Korean, Portuguese, Spanish, and Chinese (Traditional and Simplified).
- Supports multiple Gateways for large networks and campuses.

USER INTERFACE

- Integrates with Honeywell's Rapid Eye[™] Multi-Media DVR for CCTV camera viewing.
- Large intuitive display shows building floor plans in a campus footprint with respective active fire alarm devices, water supplies, evacuation routes, access routes, gas, power and HVAC shutoffs, and chemical and structural hazards in the building.
- Detailed information for active devices or critical building icons on the floor plan.
- Easy access to building, emergency contacts, site plan, and alarm event information.
- · Able to print screenshots.
- · Materials Safety Datasheet (MSDS) attachment.
- · User download of event log file.

EVENT NOTIFICATION

- Graphic and text event notification of fire, supervisory, security, and medical events.
- Fast automatic navigation to floors and locations of the emergency events.



- First alarm display to identify where the emergency started.
- Time sequence display of activated detectors to track smoke progression.
- Configurable sound notification with silence selection
- · Configurable to unlock door based on events

SYSTEM SETUP

- Screen development tool can easily import building floor plan CAD drawings (as a .wmf, .bmp, or .jpg file) and Veri-Fire® Toolsdatabases.
- Standard icon library indicates fire alarm and critical building devices.
- Ethernet and USB ports available for transferring screen database information.

Specifications

NOTE: Dimensions are subject to change. Contact NOTIFIER for further information.

- Enclosure Dimensions: 24.63" W X 22.03" H X 3.47" D (62.5602 cm H x 55.9562 cm W x 8.8138 cm D).
- Door Dimensions: 26" W X 22.75" H X 0.4" D (66.04 cm H x 57.785 cm W x 1.016 cm D).
- Power Requirements: Regulated, filtered 24 VDC @ 3.0 A via non-resettable power supply, UL Listed for fire-protective signaling use.
- Temperature Range: 0°C 50°C (32°F 120°F).

Listings and Approvals

These listings and approvals apply to ONYX FirstVision™.

UL/ULC Listed: S5697MEA: 286-07-E

CSFM: 7300-1525:0103FDNY: COA#6070

Ordering Information

WARRANTY: This product is warrantied for a period of 12 months. The PC and monitors are warranted from date of purchase for a period of 12 months. Please refer to NOTIFIER's Limited Warranty Policy for additional information.

FIRSTVISION-LCD: ONYX FirstVision™ User Interface software and hardware package. Includes 19" LCD touch-screen, Onboard Ethernet, and USB ports. Also includes one software license and screen configuration software (FirstVision-SCT). Does not include backbox, order separately.

FIRSTVISION-ENC: ONYX FirstVision™ backbox enclosure and door.

Additional required components:


NOTI•FIRE•NET Gateway (P/N NFN-GW-EM-3 or NFN-GW-PC-xx series).

- NCM-W, NCM-F or HS-NCM/WMF/WSF/MFSF for connection to NOTI•FIRE•NET™.
- Standard Ethernet network cable with RJ45 connectors.
- Standard Ethernet network cable with RJ45 connectors and hub/switch or Standard Ethernet crossover cable
- IBM-compatible PC with Windows® XP and available Ethernet or USB port (used for programming).

Applications


An ONYX FirstVision™ display is an ideal component of a NOTIFIER fire system providing real-time fire system status to firefighters. ONYX FirstVision™ interfaces directly to ONYX Series control panels and an entire NOTI•FIRE•NET network.


Firefighters' Display

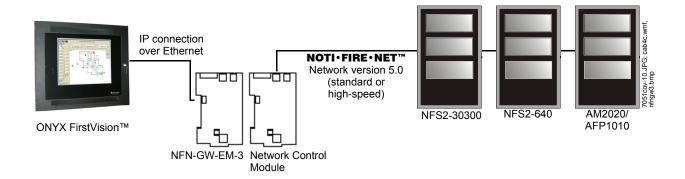



ONYX FirstVision™ Software

GRAPHICAL ICON KEY

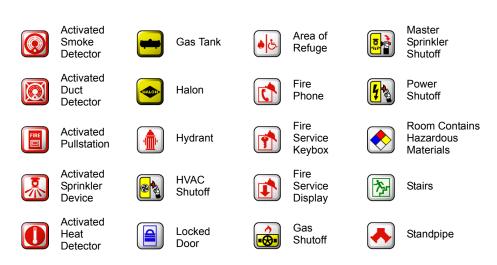

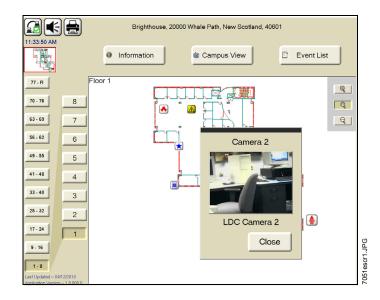

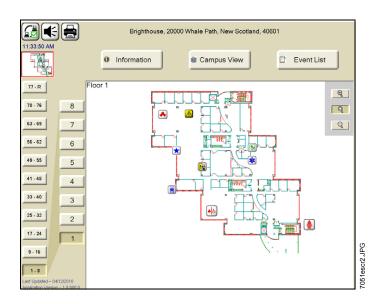

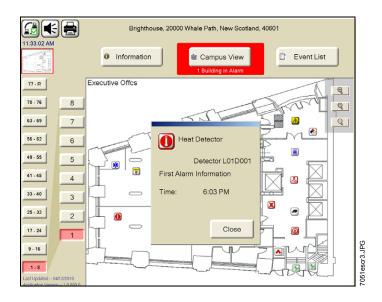







NOTIFIER®, ONYX®, and Veri-Fire® are registered trademarks of, and NOTI•FIRE•NET™, ONYX FirstVision™, and Rapid Eye™ are trademarks of Honeywell International Inc. Microsoft® and Windows® are registered trademarks of Microsoft Corporation. IBM® is a registered trademark of IBM Corporation.

©2010 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.



For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118. www.notifier.com